

09718322 11-2400

PATENT APPLICATION *A*

ATTORNEY DOCKET NO. 10007268-1

IN THE U.S. PATENT AND TRADEMARK OFFICE  
Patent Application Transmittal Letter

COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design

☒ original patent application,

☐ continuation-in-part application

jc912 U.S. PTO



11/22/00

jc914 U.S. PTO

09/718322



11/22/00

INVENTOR(S): **Mark W. Minne et al.**

TITLE: **ONE-TIME-USE DIGITAL CAMERA**

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☐ signed ☒ unsigned or partially signed  
☒ 7 sheets of drawings (one set) ☐ Associate Power of Attorney  
☐ Form PTO-1449 ☒ Information Disclosure Statement and Form PTO-1449  
☐ Priority document(s) ☒ (Other) 20 Cited References (fee \$           )

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	32 — 20	12	X \$18	\$ 216
INDEPENDENT CLAIMS	3 — 3	0	X \$80	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$270	\$ 0
BASIC FEE: Design (\$320.00 ); Utility (\$710.00 )				\$ 710
TOTAL FILING FEE				\$ 926
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 926

Charge \$ 926 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL546309738US

Date of Deposit Nov. 22, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Commissioner for Patents, Washington, D.C. 20231.

By Christine M. Welter

Typed Name: **Christine M. Welter**

Respectfully submitted,

**Mark W. Minne et al.**

By Steven E. Dicke

**Steven E. Dicke**

Attorney/Agent for Applicant(s)

Reg. No. **38,431**

Date: **Nov. 22, 2000**

Telephone No.: **(612) 573-2002**

Date of Deposit November 22, 2000

Typed Name of Person Mailing Paper or Fee: Christine M. Welter

**PATENT APPLICATION**  
**DOCKET NO. 10007268-1**

**MARK W. MINNE  
TODD A. MIKLOS  
JAMES S. VOSS**

## ONE-TIME-USE DIGITAL CAMERA

[illegible]

## ONE-TIME-USE DIGITAL CAMERA

### The Field of the Invention

The present invention generally relates to one-time-use or “disposable”  
5 cameras, and more particularly, to a system and method for a one-time-use or  
disposable digital camera.

### Background of the Invention

Disposable cameras provide a relatively inexpensive method for a user to  
capture memories on a photosensitive film without purchasing an expensive  
10 camera or if they have forgotten their camera while away from home (e.g., while  
on vacation). Disposable cameras are often sold in convenient places close to  
places where a user may have a need for such a camera, such as in convenience  
stores, shopping malls, or vacation places. A typical disposable camera includes  
a plastic housing, lens and shutter system, a film advance system, and  
15 photosensitive film preloaded within the housing. Images are captured on the  
film. The film is advanced manually. After the maximum number of pictures  
have been taken, the entire camera is brought to a developer. The developer  
removes the film from the camera for processing. The camera is either disposed  
of by the developer, or portions of the camera may be recycled by the  
20 manufacturer for reuse in a new one-time-use camera and resold to a consumer.

More advanced disposable cameras include a flash system and battery  
which automatically recharges for the next subsequent picture. Other electronics  
may be included within the disposable camera, such as an LED indicator for  
notifying a user that the flash has recharged to a level suitable for use.

25 Disposable cameras have many limitations. Disposable cameras  
typically do not employ focusable lens systems or autofocus lens systems,  
limiting picture quality. Further, since typical disposable cameras are manual,  
many other automatic features are not included with the camera such as  
automatic film advance and camera display features. Known disposable cameras  
30 are also limited to capturing an image on a photosensitive medium (i.e., film)

and are not capable of storing video (i.e., motion) or sound. Images captured on film using the disposable camera are not directly available in a digital format.

Digital cameras utilize image sensor technology and memory storage for capturing and storing images in a digital format. The digital format allows  
5 images to be available instantly with no need for a chemical development process necessary for a conventional camera using light-sensitive films. The image is captured utilizing a charge coupled device (CCD) or CMOS (complimentary metal-oxide semiconductor) sensors. Camera electronics are utilized for converting the image into a digital format. The number of pictures a  
10 user may take is limited by the size and type of memory included in the digital camera. Once the camera memory is full, it can be downloaded to a personal computer or other device and the pictures are deleted from the camera.

Modern digital cameras use removable memory storage, typically in the form of a memory card. Once a memory card is full it can be removed from the  
15 camera and replaced by a another memory card. Also, with additional hardware, memory cards can be inserted directly into a personal computer and photos read to the personal computer similar to accessing a hard disk drive. One known removable memory storage is CompactFlash available from SanDisk Corporation. CompactFlash cards weigh very little (approximately 11.4 grams)  
20 and are 43 x 36 x 3.3 mm. CompactFlash cards are based on flash memory technology and provide non-volatile storage of digital images. Known CompactFlash cards have memory capacities in the range of 4 megabytes to 48 megabytes. Another known removable memory storage is a Smart Media card (also known as SSFDC – solid state floppy disk card) available from Toshiba  
25 Corporation. Smart Media cards are smaller and lighter than compact flash cards, weighing 0.48 grams with a form factor of 45 x 37 mm and a thickness of only .78 mm. Smart Media cards have a memory storage capacity less than CompactFlash cards, with a known maximum capacity in the range of 16 megabytes. Known higher-end or professional digital cameras may use very  
30 small hard disk drives, known as microdrives, as their storage medium. One known microdrive is available from IBM Corporation. The IBM microdrive

uses a single one-inch diameter platter that weighs just 16 grams and spins at 4,500 rpms. The microdrives have much higher capacity than flash memory but consume substantially more space and power. At this time, the use of disk drives as a storage medium for everyday use digital cameras are even more impractical due to fragility and reliability reasons, because of the moving parts and extremely tight mechanical tolerances to which the hard drives are built.

The need exists for a relatively inexpensive disposable camera which includes the benefits of digital cameras such as storing a captured image in a digital format, including the ability to store both still and video images, with sound, in a digital format.

#### **Summary of the Invention**

The present invention provides a digital camera. In one aspect, the digital camera is a one-time-use or disposable digital camera for storing an image in a digital format readily available for use. The present invention also provides a method of using a one-time-use or disposable digital camera which allows a customer to receive their images in a digital format on a portable storage medium, such as a digital video disk.

In one embodiment, the present invention provides a one-time-use camera. The one-time-use camera includes an electronic digital camera system for generating digital image data representative of a captured image. A non-volatile memory is provided in communication with the electronic digital camera system for storing the digital image data. The non-volatile memory includes a memory matrix component, the matrix memory component including a first layer of parallel conductors, a second layer of parallel conductors oriented mutually orthogonal to the first set of parallel conductors, and a functional medium made of a polymer material disposed between the first layer and the second layer. An addressable cell in the functional medium is defined at an intersection of each first layer parallel conductor and second layer parallel conductor. Supplying electrical energy directly to the functional medium of the cell detects or changes the logical state of the cell, for reading and writing the digital image data at the matrix memory component.

In another embodiment, the present invention provides a method of using a one-time-use camera. The method includes defining a digital camera including a camera housing having a first portion and a second portion, an electronic digital camera system for generating digital image data representative of a captured image, and a non-volatile memory attached to the second portion of the housing and in communication with the electronic digital camera system for storing the digital image data. An image is captured using the digital camera and stored as digital image data in the non-volatile memory. The non-volatile memory is removed. The digital image data is transferred from the non-volatile memory to a portable medium.

#### **Brief Description of the Drawings**

Figure 1 is a perspective view illustrating one exemplary embodiment of a digital camera according to the present invention.

Figure 2 is a rear view of the digital camera illustrated in Figure 1.

Figure 3 is a side view illustrating one exemplary embodiment of the digital camera of Figure 1, wherein a portion of the digital camera including a memory is removable from the digital camera.

Figure 4 is a diagram illustrating one exemplary embodiment of the removable portion of a digital camera according to the present invention.

Figure 5 is a block diagram illustrating one exemplary embodiment of a digital camera according to the present invention.

Figure 6 is a block diagram illustrating one exemplary embodiment of a mode selector used with a digital camera according to the present invention.

Figure 7 is a perspective diagram illustrating one exemplary embodiment of a matrix memory component used in a digital camera according to the present invention.

Figure 8 is an enlarged partial cross-sectional view illustrating one exemplary embodiment of an intersecting region defining a cell in the matrix memory component of Figure 7.

Figure 9 is a diagram illustrating one exemplary embodiment of an electrical representation of the matrix memory component of Figure 7.

Figure 10 is an enlarged partial cross-sectional view illustrating another exemplary embodiment of a cell in a matrix memory component used in a digital camera according to the present invention.

Figure 11 is a partial cross-sectional view illustrating another exemplary embodiment of a matrix memory component used in a volumetric configuration for a digital camera according to the present invention.

Figure 12 is a flow diagram illustrating one exemplary embodiment of a method of using a digital camera according to the present invention.

#### **Description of the Preferred Embodiments**

In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope of the present invention. The following detailed description, therefore, is not to be taken in a limiting sense, and the scope of the present invention is defined by the appended claims.

Figure 1 is a perspective view illustrating one exemplary embodiment of a digital camera in accordance with the present invention at 20. Digital camera 20 is suitable for use as a one-time-use or disposable camera by employing a unique, relatively inexpensive electronic digital camera system for generating digital image data representative of a captured image, in combination with a non-volatile memory for storing the digital image data. In one preferred embodiment, the non-volatile memory is secured to a removable portion of the camera housing. In one preferred embodiment, the non-volatile memory is a relatively inexpensive memory which includes a matrix memory component including a first layer of parallel conductors oriented mutual orthogonal to a second layer of parallel conductors, separated by a functional medium including a polymer material. Supplying electrical energy directly to the functional medium of the cell detects or changes the logical state of the cell, for reading and

writing the digital image data representative of captured images at the matrix memory component. The one-time-use digital camera 20 is relatively inexpensive, while employing many features associated with high-end digital cameras used by professional photographers. The digital camera 20 can capture  
5 both high-quality (i.e., high resolution) still images and high frame rate, motion images. Additionally, the digital camera 10 can record sound associated with those captured images.

Digital camera 20 is substantially contained within housing 22. In one aspect, housing 22 is made of a rigid polymeric material (i.e., plastic). Housing  
10 22 includes multiple openings for operational and user features of digital camera 20. In one aspect, housing 22 includes push button 24, lens system 26, view finder 28, display 30, and flash system 32. Image capture button 24 is operated by a user to capture an image with digital camera 20. The captured image may be a still image or video (i.e., motion). Lens system opening 26 provides for  
15 operation of a lens system and shutter assembly to allow a photographed image to be captured by the digital camera 20. Display 30 is utilized to display operational features of digital camera 20, such as the number of pictures taken, battery status, etc. Display 30 may comprise an electronic or liquid crystal display, and may display other features as known in digital cameras. Flash  
20 system 32 includes flash 34 and flash ready indicator 36. In one aspect, flash 34 is a rechargeable flash. In one aspect, flash ready indicator 36 provides a blinking indication that flash 34 is fully recharged and ready for use.

In one embodiment, digital camera 20 includes mode selector 38, allowing digital camera 20 to be switched between different modes of operation.  
25 In one aspect, mode selector 38 operates to switch or change the operational mode of digital camera 20 between a still image mode 40 (indicated as S), a still image with sound mode 42 (indicated as SS), a video (motion) mode 44 (indicated as V) and a video with sound mode 46 (indicated as VS).

Figure 2 illustrates one exemplary embodiment of a rear view of the  
30 digital camera shown in Figure 1. Digital camera 20 may automatically advance to the next digital image storage location, or may include advance mechanism 48



for manually advancing between stored digital images or other display features. The housing 22 of digital camera 20 also includes removable portion 50. In one embodiment, the removable portion 50 is located on the back or rear side of digital camera 20. Removable portion 50 is utilized to access a non-volatile  
5 memory located with in digital camera 20 where the digital images are stored.

Figure 3 is a side elevational view illustrating one exemplary embodiment of the digital camera of Figure 1. Figure 3 illustrates removable portion 50 being removed from a front portion 52 to access a non-volatile memory 54 of digital camera 20. In one embodiment, the non-volatile memory  
10 54 is attached to the back or removable portion 50 to define a removable camera back memory assembly 56. The camera back memory assembly 56 includes tab mechanisms 58 which allow the camera back memory assembly 56 to be securely and operationally attached to digital camera 20, while also allowing removal of the camera back memory assembly 56 from the digital camera 20.  
15 Once the memory component 54 in camera back memory assembly 56 has been used (or is full), the camera back memory assembly 56 is removed from the digital camera 20. In one aspect, a second camera back memory assembly 56 is secured to the digital camera 20 using similarly aligned tab mechanisms, allowing digital camera 20 to be reused.

Figure 4 illustrates one exemplary embodiment of camera back memory assembly 56. The non-volatile memory 54 is positioned within removable portion 50, and preferably secured to a major surface of the removable portion 50. In one aspect, the memory 54 has sufficient memory capacity to hold both  
20 still and motion images. For example, memory 54 can be 100 to 200 megabytes to hold approximately 100 still images or a combination of 25-50 still images  
25 and 15 minutes worth of video or motion with sound. The capture images can be very high resolution images. Greater memory capacities can be achieved with a larger size or volume memory 54. The non-volatile memory 54 is installed "at the factory" in the portion 56. After use, the camera back memory assembly 56  
30 is removable from the digital camera 20 at a processing location, where the digital images can be immediately downloaded to a user friendly medium, such

as a digital video disk, videotape, network storage location, and/or prints of the images. As such, the user is not required to have the use of a computer. The camera back memory assembly can be replaced with a second camera back memory assembly on the digital camera 20 for use, being available to be sold  
5 again to another user. As such, the one-time-use camera may be reused or recycled. A user obtains their memories or captured images in a digital form, providing them with great flexibility and the use of those images. Further, the one-time-use digital camera 20 according to the present invention provides for an inexpensive method to capture video or motion based memories (e.g., a  
10 child's first steps, a child's first words or memories from a vacation). Further, since these memories are in a digital format, they may be readily shared electronically or on prints with friends and family members.

Figure 5 is a block diagram illustrating one exemplary embodiment of digital camera 20, suitable for use as a one-time-use digital camera. Digital  
15 camera 20 includes electronic digital camera system 60 and non-volatile memory 54. Electronic digital camera system 60 generally includes lens system 62, shutter system 64, filter system 66, solid state image capture array 68, analog to digital (A/D) converter 70, digital signal processor (DSP) 72, buffer 74, and camera processor 76. Camera processor 76 controls and processes operational  
20 signals for electronic digital camera system 60. For example, camera processor 76 receives user input 78 via camera control 80, which includes inputs from mode selector 38 or other manual user inputs, such as depression of the image capture button 24 by a user. The camera processor 76 also controls other exposure parameters and illumination parameters (e.g., operation and timing of  
25 flash 82).

Image capture array 68 is positioned behind lens system 62 for capture of a still or motion photographed image. In one aspect, image capture array 68 comprises a charge coupled device (CCD). Optionally, a filter system 66 may be positioned between the lens system 62 and image capture array 68. Shutter  
30 system 64 (e.g., a shutter and aperture mechanism) is responsive to an exposure control signal received from camera processor 76 via driver 84 for exposing the

image capture array 68 to the image focused thereon by lens system 62 in a conventional manner. The image capture array 68 is responsive to a driver 86 in order to develop raw, analog image information which is amplified and supplied to A/D converter 70. The array driver 86, operated by a timing generator 88 in response to the camera processor 76, clocks out the analog image information to the A/D converter 70 after exposure of the image array 68 is complete. The A/D converter 70 digitizes the raw, analog image information as a digital information set and supplies it to buffer memory 74. The information set is then retrieved by camera processor 76 and optionally subjected to compression before being stored in non-volatile memory component 54.

Optionally, microphone (MIC) 90 is utilized for receiving a sound signal associated with a captured image. Read only memory (ROM) 92 and random access memory (RAM) 94 are utilized for corresponding persistent and temporary storage of camera processor control programs and signal processing data. Additionally, camera processor 76 provides an output to control display 30 to display output parameters and features (e.g., number of images captured, amount of memory available, battery status, etc.).

Electronic digital camera system 60 may also include external interface 90 (indicated as 90A). External interface 90A provides an external interface to external devices for transfer of images captured by digital camera 20 to the external device or medium. For example, external interface 100 may comprise a USB port (universal serial bus interface port, as known to one skilled in the art).

Non-volatile memory 54 includes matrix memory component 100 and external interface 90B. Non-volatile memory 54 may include other electronics for communicating with electronic digital camera system 60. Matrix memory component 100 provides for persistent storage of images captured via electronic digital camera system 60. The captured images are stored in a digital format in matrix memory component 100. Optionally, external interface 90 (indicated as 90B) is located at non-volatile memory component 54. As such, digital images stored in matrix memory component 100 can be transferred to an external device via external interface 90B. The external devices (not shown) may provide for

transfer of the digital images to a user readable medium, such as a digital video disk or hard disk drive.

Figure 6 illustrates one exemplary embodiment of mode selector 38. In particular, mode selector 38 provides an output signal (such as the completion of a control circuit) to camera processor 76 via camera control 80 which is representative of the desired user mode. In one aspect shown, digital camera 20 includes still image mode 40, still image mode with sound 42, video or motion mode 44, and video with sound mode 46. A desired mode can be manually selected by a user. Through operation of the electronic digital camera system 60, including control via camera processor 76, the digital camera 20 can produce both high-quality (e.g., high resolution) still images via still image mode 40 and high frame rate motion images via video or motion mode 44. Optionally, sound associated with the captured images may be recorded via the selection of still image mode 42 or video or motion with sound mode 46.

Matrix memory component 100 provides a relatively inexpensive, reliable, high-capacity storage medium suitable for use with a one-time-use digital camera. In one embodiment, matrix memory component 100 is a write once memory. In one preferred embodiment, the matrix memory component 100 includes a first layer of parallel conductors and a second layer of parallel conductors oriented mutually orthogonal to the first set of parallel conductors. A functional medium is disposed between the first layer of parallel conductors and the second layer of parallel conductors. An addressable cell in the functional medium is defined at an intersection of each first layer of parallel conductors. Supplying an electrical energy directly to the functional medium of the cell detects or changes the logical state of the cell, for reading and writing digital image data representative of the captured images at the matrix memory component 100. In one embodiment, the functional medium is made of an organic material. In one aspect, the functional medium includes a polymer material. In one aspect, the functional medium includes an amorphous silicon material. In one aspect, the functional medium includes a low molecular weight organic material. In one aspect, matrix memory component 100 has a capacity

of 100 to 200 megabytes for storing a combination of still images or motion images. In one aspect, component 100 is capable of storing 100 still images or 25-50 still images and 15 minutes of video or motion images. In another aspect, matrix memory component 100 is greater than 200 megabytes.

5           Fig. 7 illustrates one exemplary embodiment of a matrix memory component suitable for use with one-time-use digital camera 20. The electrically addressable passive device according to the invention is realized as a matrix addressable component or device. Matrix memory component 100 includes a first layer of parallel conductors 110, a second layer of parallel conductors 112,  
10           and a functional medium 114 disposed (i.e., positioned) between conductor layer 110 and conductor layer 114. The functional medium or layer 114 is provided in the form of a planar layer. The functional medium 114 is an organic material with non-linear impedance characteristic, and may include different substances added in order to realize desired detecting or switching functions. On an upper  
15           surface of layer 114 there are provided lines for electrical addressing in the form of a plurality of electric conductors 110, and on the lower surface of the layer 114 there are correspondingly provided lines for electrical addressing in the form of parallel electric conductors 112, the conductors 110, 112 being provided mutually orthogonal such that they form a matrix. In FIG. 7 the device is shown  
20           with x conductors 110 and y conductors 112 such that the conductors form a planar orthogonal x, y matrix. A logic cell 120 in the device is generated in the functional medium 114 volume between two intersecting electric conductors 110, 112. This is emphasized by the formation of an element  $120_{kl}$  in the intersection point between the k'th conductor 110 and the l'th conductor 112.—  
25           If all elements 120 are formed with a rectifying function, the component or device may be represented by an electric network of rectifying diodes, such as shown by the equivalent diagram in FIG. 9.

          The opposing portions of the conductor  $110_k$  and  $112_l$  in an intersection point comprises together the electrode means  $E_{kl}$  of the logic cell  $120_{kl}$ , as the  
30           anode 122 in the electrode means may be the conductor  $110_k$  and the cathode 124 in the electrode means the conductor  $112_l$ . For several of the purposes of the

present invention the cell  $120_{kl}$  is denoted as a logic element or logic cell, as the material or the functional medium in the cell by the addressing may assume different physical or chemical states which represent electrically detectable logical values.

5           In section this is shown schematically in FIG. 8, wherein the functional medium 114 is provided in the form of a layer between the conductors  $110_k$ ,  $112_l$ , the anode 122 and the cathode 124 of the electrode means  $E_{kl}$ , being comprised by respectively the relevant portion of the conductor  $110_k$  and the relevant portion of the conductor  $112_l$ , in the intersection point between the  
10           conductors. In this intersection point, i.e., between the anodes 122 and the cathode 124, a passive logic cell is formed, in FIG. 8 denoted as  $120_{kl}$  in order to indicate that it is located between the conductor  $110_k$  and the conductor  $112_l$ . FIG. 8 is, of course, only a section of FIG. 7 and it is to be understood that the whole section taken along the conductor 110, 112 will show a total of  $y$  logic  
15           cells 120 and  $y$  conductors  $112_y$ . If  $x \neq y$ , the device is rectangular, and if  $x = y$ , the device is square with  $x^2$  cells.

          A more complex embodiment of the device according to the invention, exemplified as a section through a cell 120 is shown in FIG. 10. Here the electric conductor 110 is provided on a substrate 130, while the electric  
20           conductor 112 correspondingly is provided on a substrate 132. As shown in FIG. 8 the conductors 110, 112 might contact the functional medium 114 directly, but in the embodiment in FIG. 10 it is further shown provided dielectric layers 134, 136 between, respectively, the conductors 110, 112 or the substrates 130, 132. Hence the electrode means  $E$  by its anode 122 and its cathode 124 no  
25           longer contacts the functional medium 114 directly, but indirectly via the dielectric layer 134, 136, such that an indirect electric coupling is formed through the cell 120. This coupling could for instance be inductive or capacitive. If the dielectric layers 134, 136 are absent, the electrode means  $E$  will, of course, contact the functional medium 114 directly and a corresponding direct or ohmic  
30           coupling is obtained through the cell 120.

Briefly stated the volume between the anode 122 and the cathode 124 of the electrode means E, the scale of which roughly is defined by the widths of the conductors 110, 112 and the distance therebetween, i.e. the thickness of the functional medium 114, defines a logic cell 120 which for instance forms a  
5 detector element in an optical detector or a memory element in a data storage device or a switching element in a data processing device.

The anode 122 and the cathode 124 which surrounds the functional medium 114 are included in the electrode means E which, when an electric voltage is applied thereto, will cause a physical or chemical change of state in  
10 the functional medium 114. This will cause a change in the electric impedance between the anode 122 and the cathode 124 and this impedance change can be detected on the electric conductors 110, 112 which form the electrode means E in question. The logical state or the logical value in each intersection point between 110 and 112 or in each cell 120 may then be determined by measuring  
15 the electric impedance between the electric conductors 110, 112 which form the electrode means E of the cell 120.

The matrix memory component used in the digital camera according to the present invention employs a functional medium 114 with non-linear impedance characteristic and formed by one or more organic materials and this  
20 has far-reaching implications in regard of constructural flexibility, operational features and costs. An important feature of using a functional medium of this kind is the possibility of an extensive use of purely passive addressing even in very large matrices, e.g. from  $10^6$  to  $10^8$  elements provident with a density of for instance  $10^8$  elements per  $\text{cm}^2$ , as there will not be required any discrete active  
25 circuit elements in the intersection points.

The device used with the digital camera 20 according to the invention forms a substantially plane layer-like structure, and as such it is possible to stack such plane layer-like structures layerwise and form a volumetric logic device, for instance a volumetric memory device. This may be realized as in FIG. 11,  
30 wherein there is shown a volumetric device of this kind consisting of stacked layers of structures, indicated as  $100_a, 100_b, 100_c \dots 100_n$  shown in section

through a row of the cells 120 of the device, one of which is indicated in the Figure. The embodiment of the logic device according to the invention and the method used for electrical addressing in a matrix-based format at the same time realize proximity addressing, i.e. the signals for addressing are conveyed in  
5 immediate connection to the functional medium 114 and the influences this over the electrode means E which in FIG. 11 is shown for a logic cell 120 with respectively the anode 122 and the cathode 124 in the structure 100<sub>a</sub>. If several structures 100<sub>a</sub>, . . . 100<sub>n</sub> are stacked upon each other, they must be mutually isolated, preferably by an isolating layer 130 which may be electrically,  
10 thermally or optically isolating.

In principle each cell 120 of the device may have a very small extension, for instance of the magnitude of some ten nanometers and even less if the functional medium 114 for instance is based on layers of e.g. polymer materials, amorphous silicon material, etc. The thickness of the structure of 100 becomes  
15 correspondingly small and hence it will be seen that the device according to the invention with the use of electrical addressing of the cell in proximity shall render it possible to implement a volumetric data storage device with very large capacity both with regard to storage density and transfer rates. The device used in the digital camera according to the present invention has a close analogy in  
20 principally correspondingly implemented optical data storage devices based on proximity addressing and realized in volumetric embodiment. Such optical data storage devices are moreover disclosed and discussed in international patent application PCT/NO97/00154 which is included by reference, such that no further details shall be discussed in connection with the embodiment in FIG. 11  
25 and the use of the device and the method according to the invention in volumetrically implemented data storage or data processing devices, but reference only made to what has been disclosed in the above-mentioned patent application.

Another memory suitable for use as non-volatile memory in the digital  
30 camera according to the present invention is disclosed in U.S. Patent No. 6,055,180 to Gudesen et al., entitled, "Electrically Addressable Passive Device,



Method for Electrical Addressing of the Same and Uses of the Device and the Method,” issued April 25, 2000. The entire disclosure of U.S. Patent No. 6,055,180 to Gudesen et al. is incorporated herein by reference. Another memory suitable for use as a non-volatile memory in the digital camera according to the present invention is disclosed in PCT International Application No. WO 99/08325 to Inganäs et al., entitled “Electrode Means, Comprising Polymer Materials, With or Without Functional Elements and an Electrode Device Formed of Said Means,” having an international filing date of July 13, 1998. The entire disclosure of PCT International Publication No. WO 99/08325 is incorporated herein by reference. Another memory suitable for use in the digital camera according to the present invention is disclosed in PCT International Publication No. WO 00/38234 to Gudesen et al., entitled “Scalable Data Processing Apparatus,” having an international filing date of December 3, 1999. The entire disclosure of PCT International Publication No. WO 00/38234 is incorporated herein by reference.

Figure 12 is a flow diagram illustrating one exemplary embodiment of a method of using the one-time-use digital camera according to the present invention. In step 150, a digital camera is defined as including a camera housing, an electronic digital camera system for generating digital image data representative of a captured image, and a non-volatile memory in communication with the electronic digital camera system for storing the digital image data. In one aspect, the camera housing includes a first portion and a second portion, wherein the non-volatile memory is attached to the second portion of the housing and in communication with the electronic digital camera system for storing the digital image data. In one aspect, the second portion is the back of the housing.

In step 152, an image is captured using the digital camera and the image is stored as digital image data in the non-volatile memory. In one aspect, the digital image data includes one or more still images. In another aspect, the digital image data includes one or more still images with sound associated with the still images. In another aspect, the digital image data includes motion

images. In another aspect, the digital image data includes motion images with sound associated with those motion images.

In step 154, the non-volatile memory is removed from the digital camera. In one aspect, wherein the non-volatile memory is attached to a second portion  
5 of the housing, the second portion of the housing and the non-volatile memory are removed from the digital camera. In one preferred embodiment, the non-volatile memory is attached to a back portion of the housing.

In step 156, the digital image data is transferred from the non-volatile memory to a portable medium. In one aspect, the portable medium is a digital  
10 video disk. In another aspect, the portable medium is a CD-ROM. In another aspect, the portable medium is photographic prints. The non-volatile memory may include an external interface for aiding in transferring the digital image data from the non-volatile memory to an external device for producing the portable medium including the digital image data.

The portable medium (e.g., CD-ROM, DVD, videotape, etc.) containing  
15 the digital image data is sent back to the user. In one aspect, the digital camera including the non-volatile memory is brought to a developer or mailed to a central developing location. The digital image data is transferred from the non-volatile memory to a portable medium. The portable medium containing the  
20 digital image data is sent back to the user. The non-volatile memory associated with the digital camera is replaced with a second non-volatile memory. As such, the digital camera is available for reuse and resale.

In one preferred embodiment, the method includes the step of defining the non-volatile memory to include a write once memory matrix component  
25 including a first layer of parallel conductors, a second layer of parallel conductors oriented mutually orthogonal to the first layer of parallel conductors, and a functional medium disposed between the first layer and the second layer, wherein an addressable cell in the functional medium is defined at an  
intersection of each first layer parallel conductor and second layer parallel  
30 conductor. In one aspect, the functional medium is an organic material having non-linear impedance characteristics. In one aspect, the functional medium

includes a polymer material. In one aspect, the functional medium includes an amorphous silicon material. In one aspect, the functional medium includes a low molecular weight organic material. With the unique write once memory matrix component used in the digital camera according to the present invention, the

5 digital image data representative of captured still images and/or motion images are “locked” in memory and cannot be overwritten. Further, the non-volatile memory can be replaced with a second non-volatile memory in the digital camera. As such, the digital camera is refurbished and available for reuse. For example, the digital camera with a second non-volatile memory can be sent back

10 into the retail channel for resale. Further, the one-time-use digital camera according to the present invention provides a relatively inexpensive way for both still and motion images to be captured without requiring the purchase of an expensive digital camera or video camera.

Although specific embodiments have been illustrated and described

15 herein for purposes of description of the preferred embodiment, it will be appreciated by those of ordinary skill in the art that a wide variety of alternate and/or equivalent implementations calculated to achieve the same purposes may be substituted for the specific embodiments shown and described without departing from the scope of the present invention. Those with skill in the

20 chemical, mechanical, electro-mechanical, electrical, and computer arts will readily appreciate that the present invention may be implemented in a very wide variety of embodiments. This application is intended to cover any adaptations or variations of the preferred embodiments discussed herein. Therefore, it is manifestly intended that this invention be limited only by the claims and the

25 equivalents thereof.

WHAT IS CLAIMED IS:

1. A one-time-use camera comprising:  
an electronic digital camera system for generating digital image data  
5 representative of a captured image;  
a non-volatile memory in communication with the electronic digital  
camera system for storing the digital image data, the non-volatile memory  
comprising a matrix memory component, the matrix memory component  
including a first layer of parallel conductors, a second layer of parallel  
10 conductors oriented mutually orthogonal to the first set of parallel conductors,  
and a functional medium disposed between the first layer and the second layer,  
wherein an addressable cell in the functional medium is defined at an  
intersection of each first layer parallel conductor and second layer parallel  
conductor; and  
15 wherein supplying an electrical energy directly to the functional medium  
of the cell detects or changes the logical state of the cell, for reading and writing  
the digital image data at the matrix memory component.
2. The camera of claim 1, wherein the functional medium is made of an  
20 organic material with non-linear impedance characteristics.
3. The camera of claim 1, wherein the functional medium includes a  
polymer material.
- 25 4. The camera of claim 1, wherein the functional medium includes an  
amorphous silicon material.
5. The camera of claim 1, wherein the functional medium includes a low  
molecular weight organic material.

30

6. The camera of claim 1, further comprising an external interface wherein the external interface is configured for transfer of the digital image data to an external device.

5 7. The camera of claim 1, further comprising a camera housing, wherein the wherein the non-volatile memory component is attached to the housing.

8. The camera of claim 7, wherein the housing includes a front portion and a back portion, wherein the non-volatile memory component is attached to the  
10 back portion defining a camera back memory assembly.

9. The camera of claim 8, wherein the camera back memory assembly is removable from the front portion.

15 10. The camera of claim 9, wherein the camera back assembly is replaceable with a second camera back assembly.

11. The camera of claim 1, wherein the non-volatile memory component is removable from the camera.  
20

12. The camera of claim 11, wherein the non-volatile memory component is replaceable with a second non-volatile memory component for reuse of the camera.

25 13. The camera of claim 1, wherein the memory component includes an external device interface for transferring the digital image data to an external device.

14. The camera of claim 1, wherein the electronic digital camera system  
30 includes a lens system, a shutter system, a charge coupled device, an analog to digital converter, a digital signal processor, and a camera system processor for

receiving an image and converting the image to digital image data stored in the memory component.

15. The camera of claim 1, wherein the electronic digital camera system  
5 includes an external device interface for transferring the digital image data stored at the memory component to an external device.

16. A one-time-use camera comprising:  
an electronic digital camera system for generating digital image data  
10 representative of a captured image, the electronic digital camera system including a mode switch for allowing a user to select a mode of operation of the camera;  
a non-volatile memory in communication with the electronic digital camera system for storing the digital image data, the non-volatile memory  
15 comprising a matrix memory component, the matrix memory component including a first layer of parallel conductors, a second layer of parallel conductors oriented mutually orthogonal to the first set of parallel conductors, and a functional medium disposed between the first layer and the second layer, wherein an addressable cell in the functional medium is defined at an  
20 intersection of each first layer parallel conductor and second layer parallel conductor; and  
wherein supplying an electrical energy directly to the functional medium of the cell detects or changes the logical state of the cell, for reading and writing the digital image data at the matrix memory component.

25

17. The camera of claim 16, wherein the electronic digital camera system includes a microphone system for recording sound as part of the digital image data.

30 18. The camera of claim 16, including a selectable mode of operation for recording a still picture as the digital image data.

19. The camera of claim 16, including a selectable mode of operation for recording still picture and sound associated with the still picture as the digital image data.

5

20. The camera of claim 16, including a selectable mode of operation for recording video as the digital image data.

21. The camera of claim 16, including a selectable mode of operation for recording video and sound associated with the video as the digital image data.

22. A method of using a one-time-use camera comprising:  
defining a digital camera including a camera housing, an electronic digital camera system for generating digital image data representative of a captured image; and a non-volatile memory including a write once memory matrix component in communication with the electronic digital camera system for storing the digital image data;

capturing an image using the digital camera and storing the image as digital image data in the non-volatile memory;  
removing the non-volatile memory; and  
transferring the digital image data from the non-volatile memory to a portable medium.

23. The method of claim 22, comprising defining the write once memory matrix component including a first layer of parallel conductors, a second layer of parallel conductors oriented mutually orthogonal to the first set of parallel conductors, and a functional medium disposed between the first layer and the second layer, wherein an addressable cell in the functional medium is defined at an intersection of each first layer parallel conductor and second layer parallel conductor.

24. The method of claim 22, defining the portable medium as photographic prints.

25. The method of claim 22, defining the portable medium as a digital video  
5 disk.

26. The method of claim 22, further comprising replacing the non-volatile  
memory with a second non-volatile memory such that the one-time-use camera  
is available for reuse.  
10

27. The method of claim 26, wherein the step of replacing the non-volatile  
memory with a second non-volatile memory includes replacing the second  
portion of the housing with a third housing portion having the second non-  
volatile memory attached thereto.  
15

28. The method of claim 22, further comprising the step of sending the  
portable medium to a user.

29. The method of claim 22, including defining the functional medium to  
20 include an organic material having non-linear impedance characteristics.

30. The method of claim 22, including defining the functional medium to  
include an amorphous silicon material.

25 31. The method of claim 22, including defining the functional medium to  
include a polymer.

32. The method of claim 22, including defining the functional material to  
include a low molecular weight organic material.  
30



## ONE-TIME-USE DIGITAL CAMERA

### Abstract of the Disclosure

5           In one embodiment, the present invention provides a one-time-use camera. The one-time-use camera includes an electronic digital camera system for generating digital image data representative of a captured image. A non-volatile memory is provided in communication with the electronic digital camera system for storing the digital image data. The non-volatile memory component  
10 includes a memory matrix component, the matrix memory component including a first layer of parallel conductors, a second layer of parallel conductors oriented mutually orthogonal to the first set of parallel conductors, and a functional medium disposed between the first layer and the second layer. An addressable cell in the functional medium is defined at an intersection of each first layer  
15 parallel conductor and second layer parallel conductor. Supplying electrical energy directly to the functional medium of the cell detects or changes the logical state of the cell, for reading and writing the digital image data at the matrix memory component.

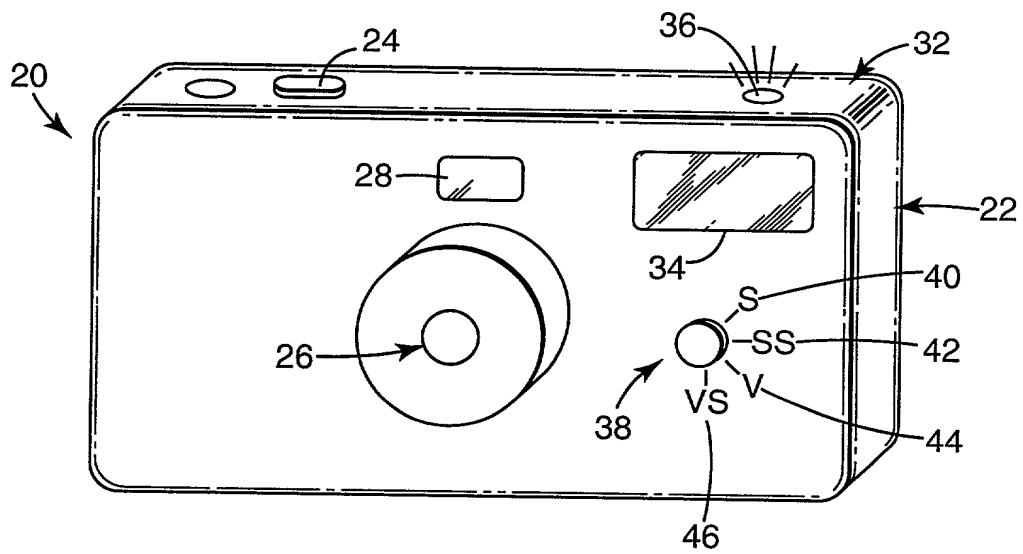


Fig. 1

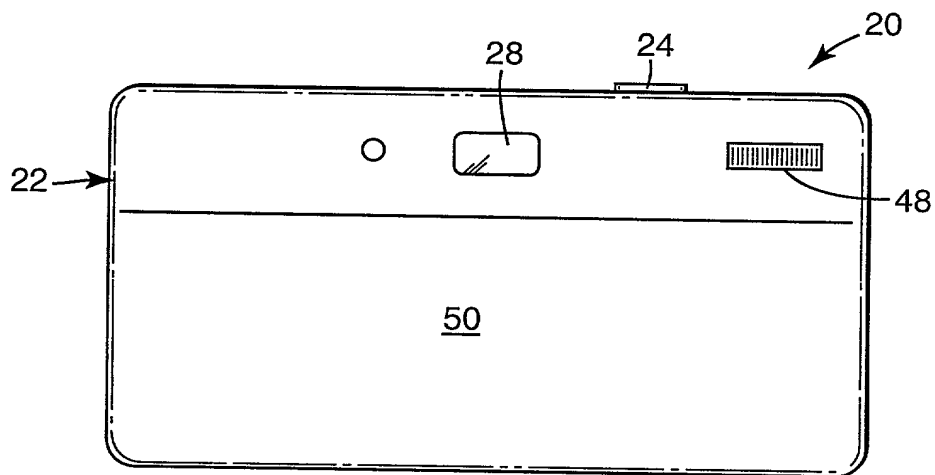


Fig. 2

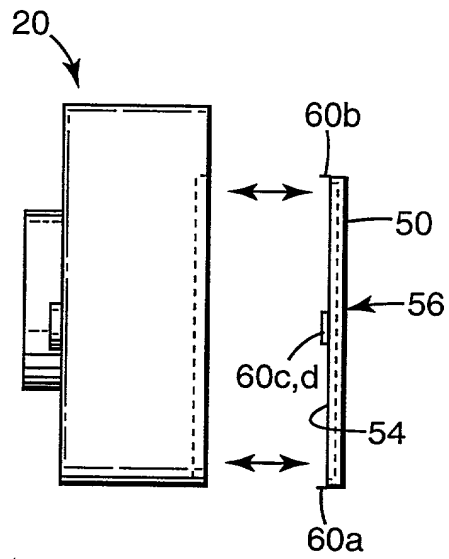


Fig. 3

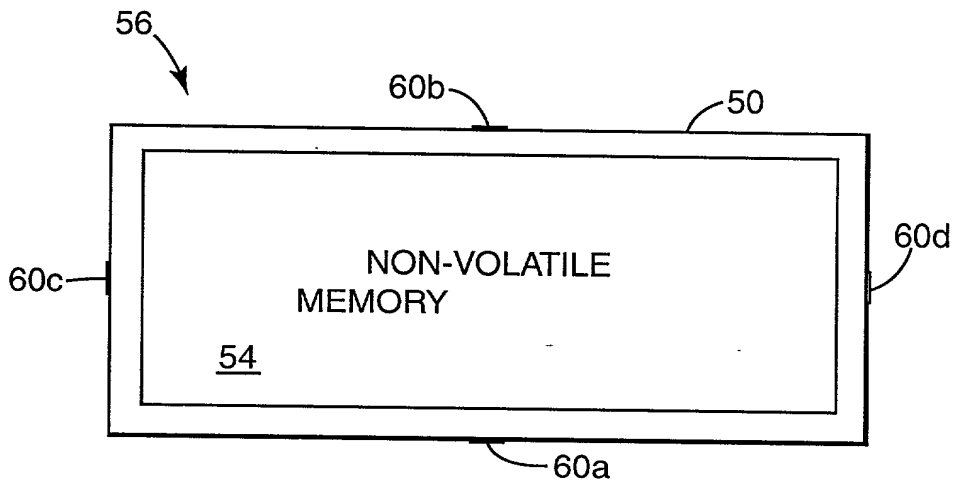


Fig. 4

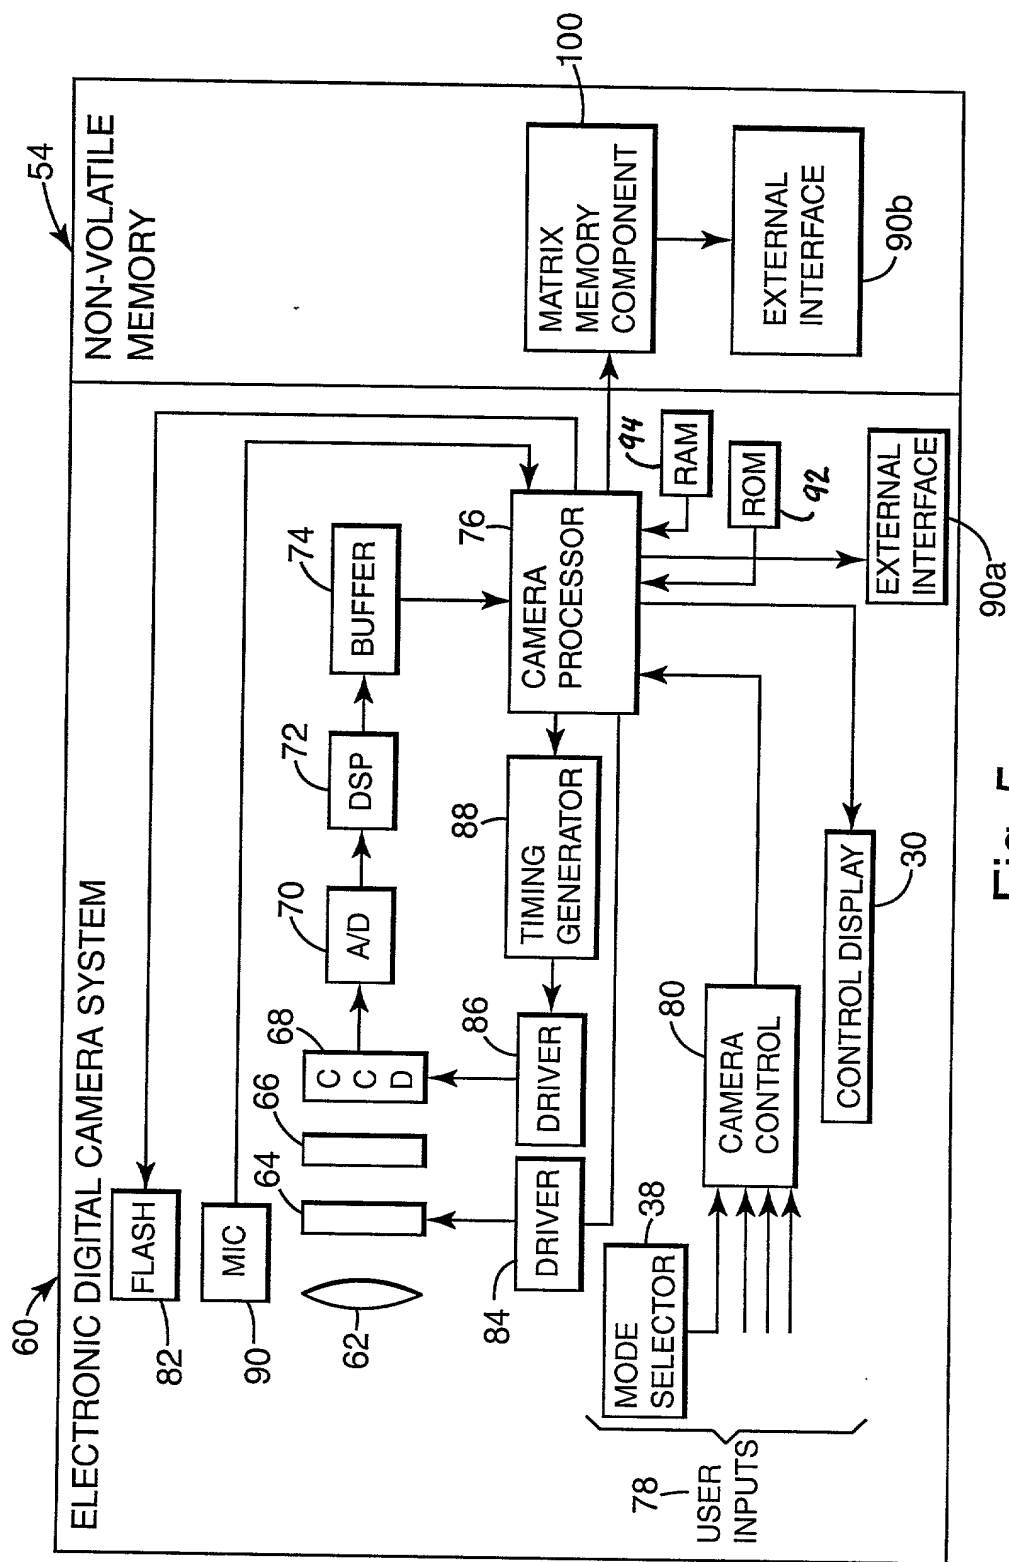


Fig. 5

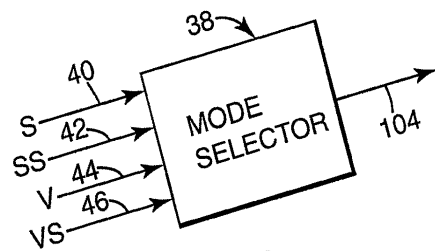


Fig. 6

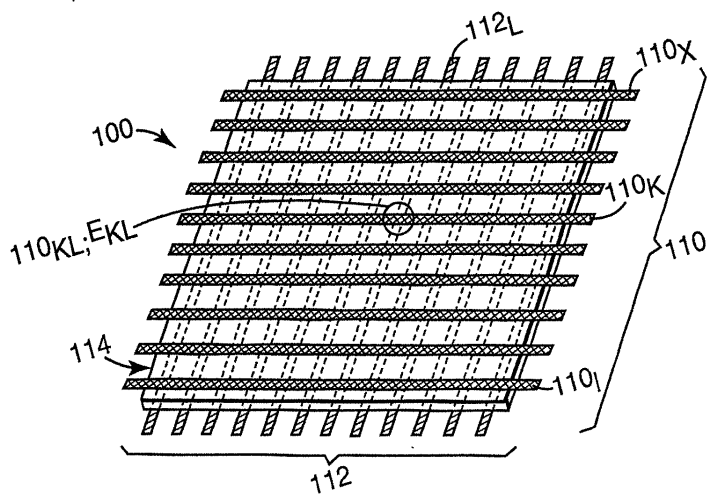


Fig. 7

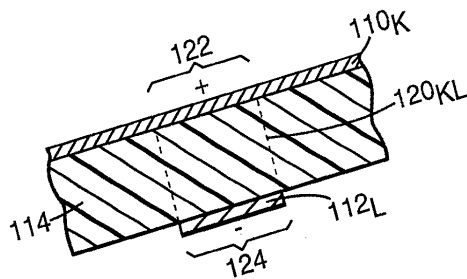


Fig. 8

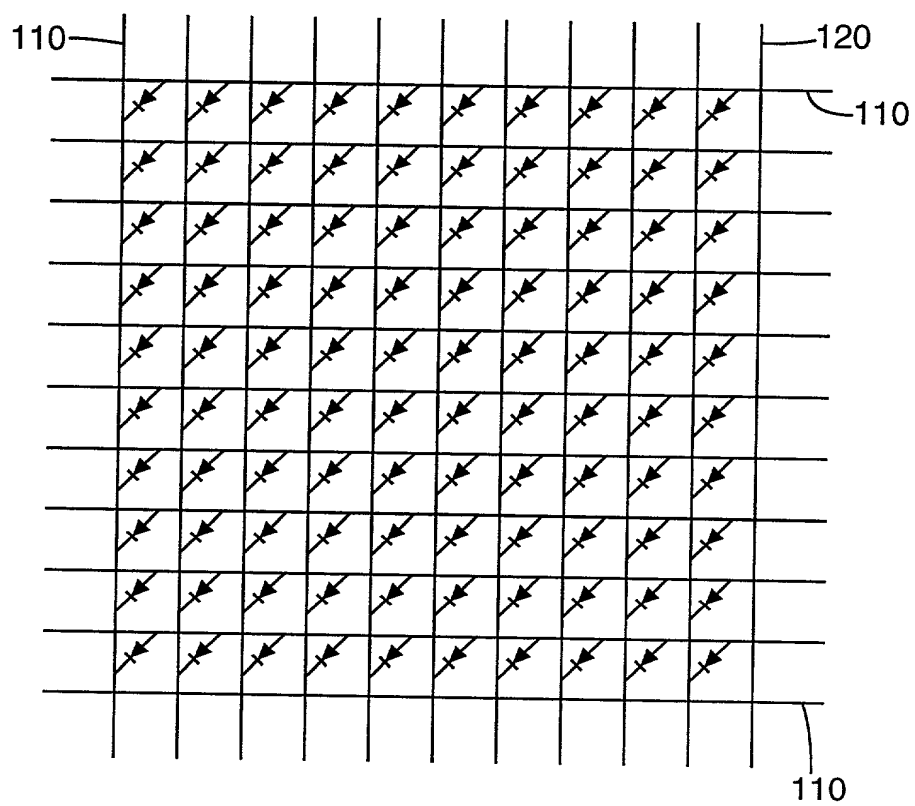


Fig. 9

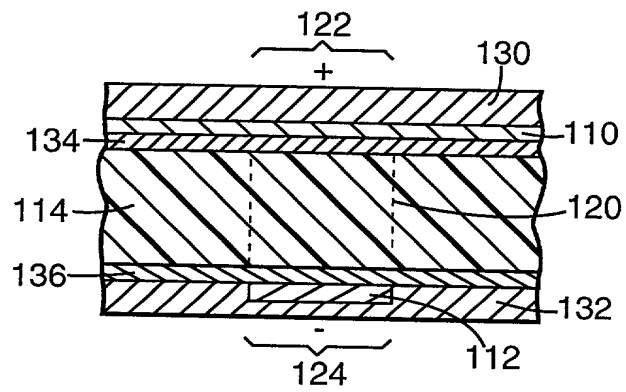


Fig. 10


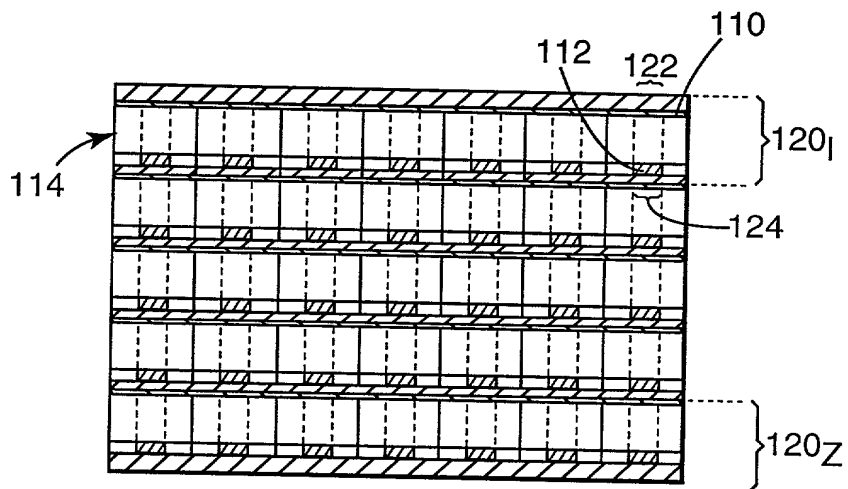


Fig. 11



**FIG. 12**

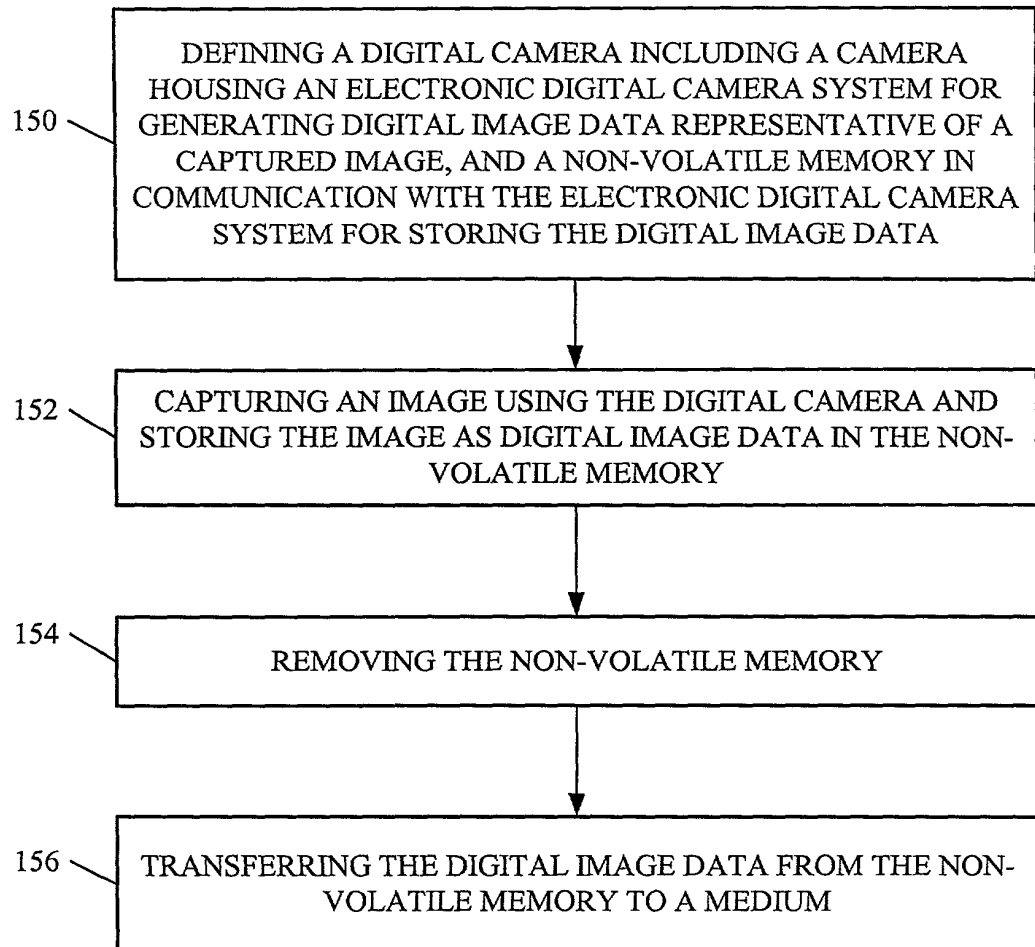

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**ATTORNEY DOCKET NO. 10007268-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**ONE-TIME-USE DIGITAL CAMERA**

the specification of which is attached hereto unless the following box is checked:

(X) was filed on Nov. 22, 2000 as US Application Serial No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

**Foreign Application(s) and/or Claim of Foreign Priority**

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

**Provisional Application**

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

**U. S. Priority Claim**

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

**POWER OF ATTORNEY:**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer  
Number Bar Code  
Label here

Send Correspondence to:  
**HEWLETT-PACKARD COMPANY**  
 Intellectual Property Administration  
 P.O. Box 272400  
 Fort Collins, Colorado 80527-2400

**Direct Telephone Calls To:**

**Steven R. Ormiston**  
**(208) 396-2544**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Mark W. Minne Citizenship: U.S.A.Residence: 4809 Lakeshore Place, Boise, Idaho 83703Post Office Address: Same as above

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

**DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION (continued)**

ATTORNEY DOCKET NO. 10007268-1

Full Name of # 2 joint inventor: Todd A. Miklos Citizenship: U.S.A.

Residence: 731 Sandpiper Point, Fort Collins, Colorado 80525

Post Office Address: Same as above

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 3 joint inventor: James S. Voss Citizenship: U.S.A.

Residence: 1709 Bluegate Court, Fort Collins, Colorado 80526

Post Office Address: Same as above

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 4 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 5 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 6 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 7 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Full Name of # 8 joint inventor: \_\_\_\_\_ Citizenship: \_\_\_\_\_

Residence: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_